



- ▶ Item Table
- ▶ Product Table
- ▶ Certificates
- ▶ Mounting Instruction
- ▶ Print ?
- ▶ PDF

- ▶ Searchlight
- ▶ Floodlight
- ▶ Navigation
- ▶ Helideck
- ▶ Hazardous Area
- ▶ Exterior
- ▶ Installation
- ▶ Exit Sign
- ▶ Decorative
- ▶ **Downlight**
 - 230/240 V
 - 12V/230V
 - 12V
- ▶ Interior
- ▶ Electrical heating

DOWNLIGHT


230/240 V

CASA 19

- Variety of reflectors in white baffle, PC or aluminium
- Simple mounting of additional light controllers to baffle
- Many varieties of decor available, including IP45
- Easy mounting of decor with bayonet connection
- Simple to install and change light sources



Easy installation of CASA.

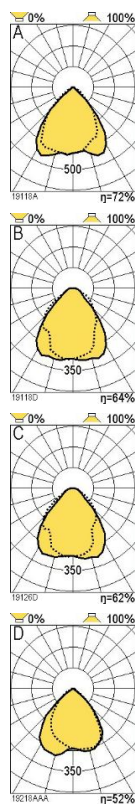Specifications

Luminaire body made of self-extinguishing PBT with reflector made of anodized pure aluminium or metallized PC.

Electrical housing is made in cold galvanized steel.

Décor elements made in painted or chromed steel, brass, aluminium, glass and acrylic.

Trim ring, décor elements and light control components have to be ordered separately.

Pivot mounting of light source for easy replacement.

Can be supplied with 1 or 3 hours integrated battery backup.

All internal wiring is double insulated and halogen free.

Light source

18 and 26W TC-D/TC-DEL.

Light source not included.

Ballast

Delivered with compensated conventional ballast (F), electronic ballast (HF), digital dimmable ballast (HFDd) or 1-10V analogue dimming (HFDa).

Mounting

Mounting by using adjustable brackets or screws.


Max ceiling thickness 50mm. Over 25mm, to be fixed by using screws.



Bracket for slanted ceiling can be ordered. Weight distribution panel for T-profile ceiling available.

Connection

2.5mm² 5-way push-in terminal block ready for through wiring. Supplied with two membrane grommets and aperture for control cable. Can be supplied with cable and plug with cable clamp.

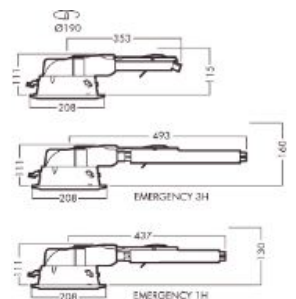

IP22/IP45, Ta=25°C

SEARCH FOR PRODUCTS